

# STREAMO



**STEAMER CHINA**

FLOORING FOR SHIPS AND OFFSHORE PLATFORMS

适用于船舶和海工平台的地板

**Gerflor**<sup>®</sup>  
the flooring group

# STREAMO STEAMER



PUR

100 % recyclable



PUR special treatment  
PUR特殊维护处理



Compacted, calendered floorcovering  
致密压延型地板

- Homogenous multipurpose flooring 同质透心多功能地板
- Available in sheets 可供卷材
- Smooth directional design 柔和的方向性花纹设计
- Flexible and easy to weld for maximum hygiene and watertightness  
弹性柔软易于安装和焊接，最佳的洁净性和防水性
- PUR special treatment: good foundation for easier routine maintenance.  
PUR特殊维护处理：易于日常维护保养



1107 Cloud



1103 Lagoon



0107 Cream



0335 Stone



0312 Sea



0307 Brown






0303 Grey



0306 Green

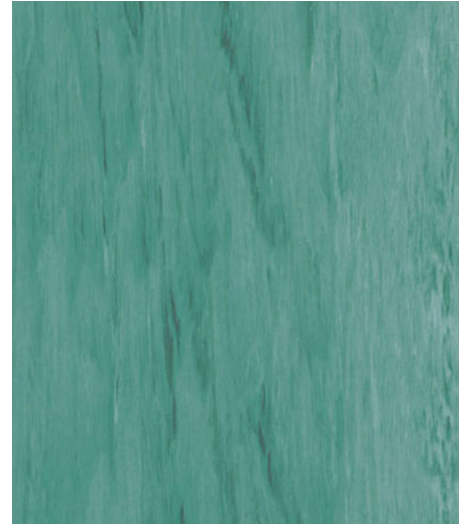

1101 Jade



1102 Chocolate



0334 Papaya



0309 Grape



# STREAMO STEAMER

**STREAMO STEAMER** is a homogeneous calendared vinyl floorcovering in sheets with colouration throughout the thickness of the material.

It receives a polyurethane (PUR) special treatment for ease of maintenance. It is suitable for normal to heavy traffic areas.

**STREAMO STEAMER** is anti-bacterial and fungicidal. The flooring complies with IMO regulations.

**STREAMO STEAMER** 是经过压延处理的致密型同质透心卷材，带有方向性的花纹设计贯穿整个地板厚度。

产品经过聚氨酯加强PUR特殊维护处理，易于维护保养。适用于人流量繁忙区域。

**STREAMO STEAMER** 具有抗菌防霉性能。该产品符合IMO规范。

## INSTALLATION 安装


Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

应按照洁福技术部门提供的安装标准及当地标准进行安装。

## MAINTENANCE 维护

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad.

定期进行维护以保持地板外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板，或使用带有衬垫的清洁机清洁。

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. 橡胶会在乙烯基地板上留下无法擦拭的污点：请勿在PVC地板上使用橡胶脚垫，用PVC或尼龙材质代替家具橡胶脚垫。

DESCRIPTION 规格			
Total thickness 总厚度	EN ISO 24346 [EN 428]	mm	2
Weight 重量	EN ISO 23997 [EN 430]	kg/m <sup>2</sup>	3.4
Width length of sheet 卷宽	EN ISO 24341 [EN 426]	cm/lm	200/20
CLASSIFICATION 类别			
Norm / Product specification 产品规范	-	-	EN ISO 10581 [EN 649]
Fire rating 防火等级	IMO认证	-	MSC 307(88) Part 5
			MSC 307(88) Part 2
	海事认证	-	MED
			US Coast Guard
			Transport Canada
SOLAS 74			
Static electrical propensity 抗静电性	EN 1815	KV	< 2
PERFORMANCE 性能			
Slip resistance wet 防湿滑性	DIN 51130	class	R9
Abrasion resistance 耐磨性	EN 660.2	mm <sup>3</sup>	≤7.5
Abrasion group 耐磨等级	EN 649	group	M
Dimensional stability 尺寸稳定性	EN ISO 23999 [EN 434]	%	≤ 0.4
Residual indentation 残余凹陷性	EN ISO 24343-1 [EN 433]	mm	≤ 0.03
Thermal conductivity 热传导性	EN ISO 10456 [EN 12524]	W/(m.K)	0.25
Colour fastness 颜色稳定性	EN 20105 - B02	degree	≥ 6
Chemical products resistance 抗化学性	EN ISO 26987 [EN 423]	-	OK
Anti-bacterial and fungicidal 抗菌防霉性能	-	-	OK
Special treatment 特殊维护处理	-	-	PUR
TVOC after 28 days 28天后TVOC*排放量	ISO 16000 - 6	µg/m <sup>3</sup>	< 10

\*TVOC: 挥发性有机化合物总排放量



GERFLOR CHINA 洁福中国  
SHANGHAI OFFICE 上海办公室  
Tel. / 电话: + 86-21-63578818

streamobygerflor.com streamobygerflor.cn

**Gerflor**  
theflooringgroup